


ELEPHANT ZERVEboard



Gypsum Service Panel



The Siam Gypsum Industry (Saraburi) Co., Ltd.
A member of USG Boral Building Products



ELEPHANT
Gypsum Board



Traditional interior ceiling systems for buildings or houses do not allow ceiling board to be opened as well as the T-bar ceiling system allow. If opening the ceiling board is required for inspection, modification or repairs we most likely have a board for you that opens and closes easily, without damage.

ZerveBoard is a prefabricated 9mm. thick ceiling service board that is designed to seamlessly blend in with other ceiling board products. ZerveBoard comes in a selection of different types and designs for interior designs such as square corner, rounded-corner and other standard forms for general rooms as well as in MoistBloc specially used in bathrooms, toilets or kitchens. Each set is composed of ceiling board and frame.

In addition, tailor-made options are available that can be customized for special applications such as different widths and lengths, opening operation method, gypsum board type as well as other types for special applications.

Features

-  Easy installation, saving time as the prefabricated board can be attached at the site promptly and without delay.
-  Neat appearance service board without a frame that blends in with existing ceiling boards.
-  Easy-to-open/close with good strength and of high-quality material.
-  Allows you to add an opening to an existing ceiling without the need for entire disassembly.
-  Flexibility to install at any location without it causing a visual annoyance.

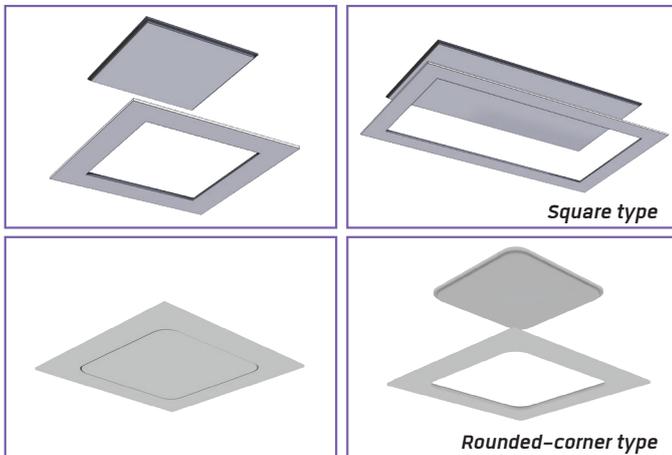

Square type	Ceiling service opening dimension (width x length)	Frame dimensions (width x length)
Zerveboard Standard	300x300 mm.	500x500 mm.
	450x450 mm.	650x650 mm.
	600x600 mm.	800x800 mm.
	600x1200 mm.	800x1400 mm.
Zerveboard MoistBloc	300x300 mm.	500x500 mm.
	450x450 mm.	650x650 mm.
	600x600 mm.	800x800 mm.
	600x1200 mm.	800x1400 mm.
Rounded-corner type	Ceiling service opening dimensions (width x length)	Frame dimensions (width x length)
Zerveboard Standard	450x450 mm.	650x650 mm.
	600x600 mm.	800x800 mm.
Zerveboard MoistBloc	450x450 mm.	650x650 mm.
	600x600 mm.	800x800 mm.


How to install



1. Choose the size of the Zerveboard you wish to install and mark its position on the concealed ceiling.
2. Install Pro C Line on the marked position. In case of selected position is under the upper Pro C Line, make sure that Pro C Line is cut down to fit.
3. Attach the outer piece of Zerveboard to the lower Pro C Line using black screws with a spacing at a maximum of 150mm. along the circumference.
4. Cover the joint with Elephant cotton tape then plaster the joint and screw heads with Easy Joint compound.
5. Going through the outer piece, place the inner piece of Zerveboard on top making sure it is secured firmly.

*Note: The paint should only be applied after both pieces of Zerveboard are installed in the ceiling.

Installation method for Elephant Zerveboard

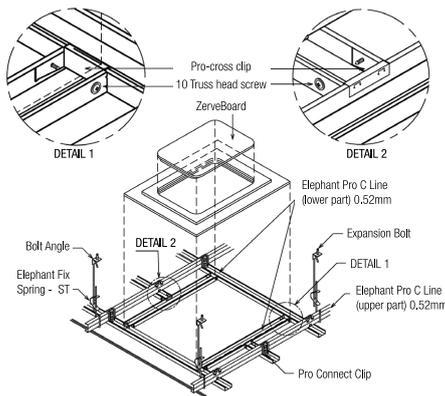

Requirements for installation

1. Pro C Line, needed for Zerveboard
2. Pro Cross Clip, used in conjunction with Pro C Line
3. 10mm. truss head screw
4. 25mm. gypsum screw
5. Elephant cotton tape
6. Easy Joint compound

*Note: quantity of requirements depends on spacing and Zerveboard size

