

Gypsum Plaster



Advantages

1.) Super White Finishing

Clear, Super white finishing on walls. Painting becomes easier on white smooth surface.

2.) Smooth Surface

No more cracks and no more rough surfaces.

3.) Increases efficiency

Easy to mix, makes installers work quicker. Plastering becomes very efficient.

4.) Provides Value


Get more done efficiently at a valuable price.

5.) Worldwide certified


High technology productions procedures that are certified with ISO 14000 and finishing goods passed the ASTM standard

Gypsum Plaster

Technical Property	Specification
Water and Powder ratio	1 : 2.5
Dry Bulk Density	Max. 720 Kg/m ³
Dry Set Density	Max. 1670 Kg/m ³
Working time	60-90 minute
Setting time	3.15-3.45 Hr.Min
Approximated Coverage	500 m ² for thickness approx. 2 mmm M ² /T
Quality Assurance	As ASTM C28 and TIS 188-2547
Green Credentials	ISO 14000

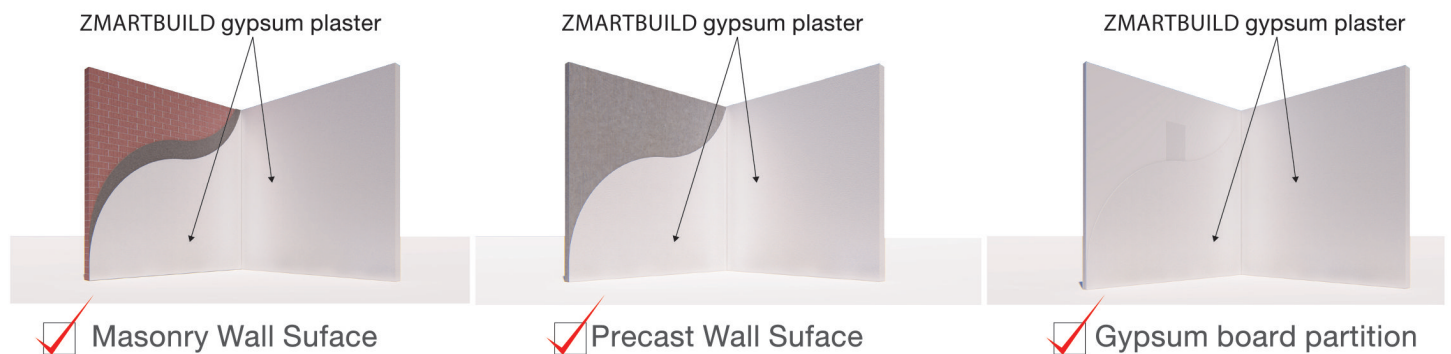

Application on masonry surface

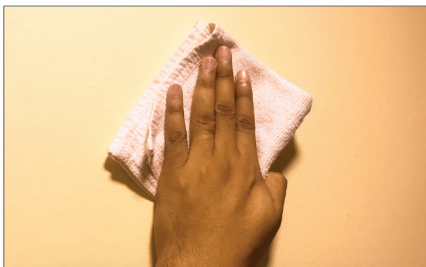

Clean surface before plastering, remove dust, stain or any dirt from wall. In case of plastering on mortar cement plaster, it should be repair some crack or hole before plastering

Recommendation for painting

Paint technique :

The Plaster should dry completely before paint or other decoration. Paint should not decay or expired

Acrylic painting :

In case of painting is acrylic base, the plaster should apply primer before and primer should be acrylic base

